

**AH-700-E - HONDA GX 390/ GASOLINE 3600 rpm | 60 Hz**

**SINGLE PHASE  
120 V**

## TECHNICALS SPECIFICATIONS



Image for guidance purposes.

Model:

# AH-700

Gen set composed of engine and alternator perfectly assembled and fitted in a practical tubular chasis, that is adding great strenght and versatility.

**STANDBY POWER:**  
(LTP "Limited Time Power" norma ISO 8528-1) **6,9 kVA**

### Genset general characteristics

Standby power LTP (kVA)	6,9
Frequency (Hz)	60
R.p.m.	3600
Voltage (V)	120
(Cos ø)	1

## ENGINE CHARACTERISTICS

MAKE	MODEL
<b>HONDA</b>	<b>GX 390</b>
Mechanical effect power (kWm)	7
No. cylinders	1
Displacement (cm <sup>3</sup> )	389
Diameter x stroke (mm)	88x64
Compresion ratio	8,0:1
Cooling system	Air
Series regulator	Mechanical
Start	Electric battery
Fuel	Gasoline
Fuel tank capacity (L)	6,1
Fuel consumption 100% (L/h)	3,5
Oil tank capacity (L)	1,1

**AH-700-E - HONDA GX 390/ GASOLINE 3600 rpm | 60 Hz**

**SINGLE PHASE  
120 V**

## ALTERNATOR CHARACTERISTICS


Voltage (V)	120
Frequency (Hz)	60
R.p.m.	3600
No. poles	2
Protection degree IP	21
Insulation	H

## SOCKETS DESCRIPTION:

Depending on the market demand (optional).

## DIMENSIONS AND WEIGHT

Lenght (mm)	740
Width (mm)	530
Height (mm)	530
Weight (kg)	85

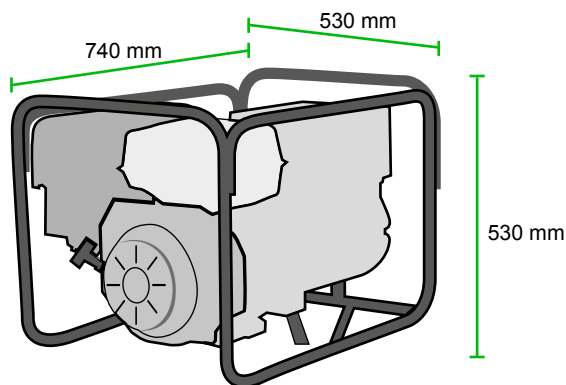

## OPTIONAL

TRANSPORT KIT